ASSEMBLY INSTRUCTIONS:

HOW TO REPLACE HALOGEN BULB

1. DISCONNECT POWER BEFORE REPLACING BULB AND LAMP SHADE HAVE SUFFICIENT TIME (AT LEAST TO MINUTES) TO COOL DOWN.
2. LOOSE THE SCREW THEN REMOVE WIRE CLIP AND GLASS SHIELD FOR SHADE
3. REMOVE THE OLD BULB.
4. INSERT A NEW HALOGEN BULB (TYPE 6" 100) BY PLACING THE BULB PINS INTO BOTH HOLES IN SOCKET MAKE SURE PINS ARE PROPERLY ALIGNED BEFORE FIRMALY PUSHING SEAT.
5. INSTALL GLASS SHIELD AND WIRE CLIP BACK ONTO THE SHADE AND SECURE THE SCREW.
6. PLUG ELECTRICAL CORD INTO POWER SOURCE.

IMPORTANT SAFETY INSTRVCTIONS LIGHTED LAMP IS HOT!

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER). AS A FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK,THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF THE PLUG DIES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

WARNING – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, & EXPOSURE TO EXCESSIVE UV RADIATION, OR INJURY TO PERSONS:

1. TURN OFF/UNPLUG AND ALLOW TO COOL BEFORE REPLACING LAMP.
2. LAMP GETS HOT QUICKLY! ONLY CONTACT SWITCH/PLUG WHEN TURNING ON.
3. DO NOT TOUCH HOT LENS, OR ENCLOSURE.
4. DO NOT REMIN IN LIGHT IF SKIN FEELS WARM.
5. DO NOT LOOK DIRECTLY AT LIT LAMP.
6. KEEP LAMP AWAY FROM MATERIALS THAT MAY BURN.
7. UAE ONLY WITH A 120V/100 WATT OR SMALLER LAMP.
8. DO NOT TOUCH THE BULB AT ANY TIME. USE A SOFT CLOTH. OIL FROM SKIN MAY DAAAMAGE BULB.
9. DO NOT OPERATE THE LMAP WITH A MISSING OR DAMAGED GUARD LAMP CONTAINMENT BARRIER, OR UV LIGHT FILTER.

※ PLEASE INFORM YOUR DEALER IMMEDIATELY IN CASE OF ANY PARTS SHORTAGE.
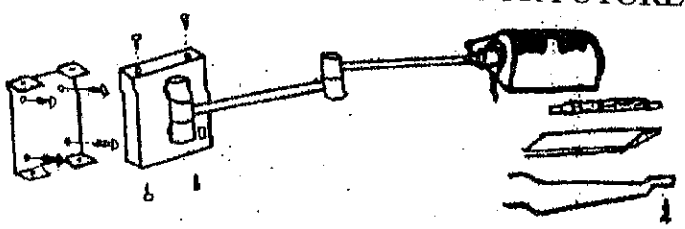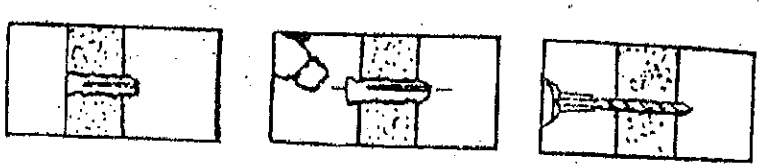
※ SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.